



BEKT-S901CA II

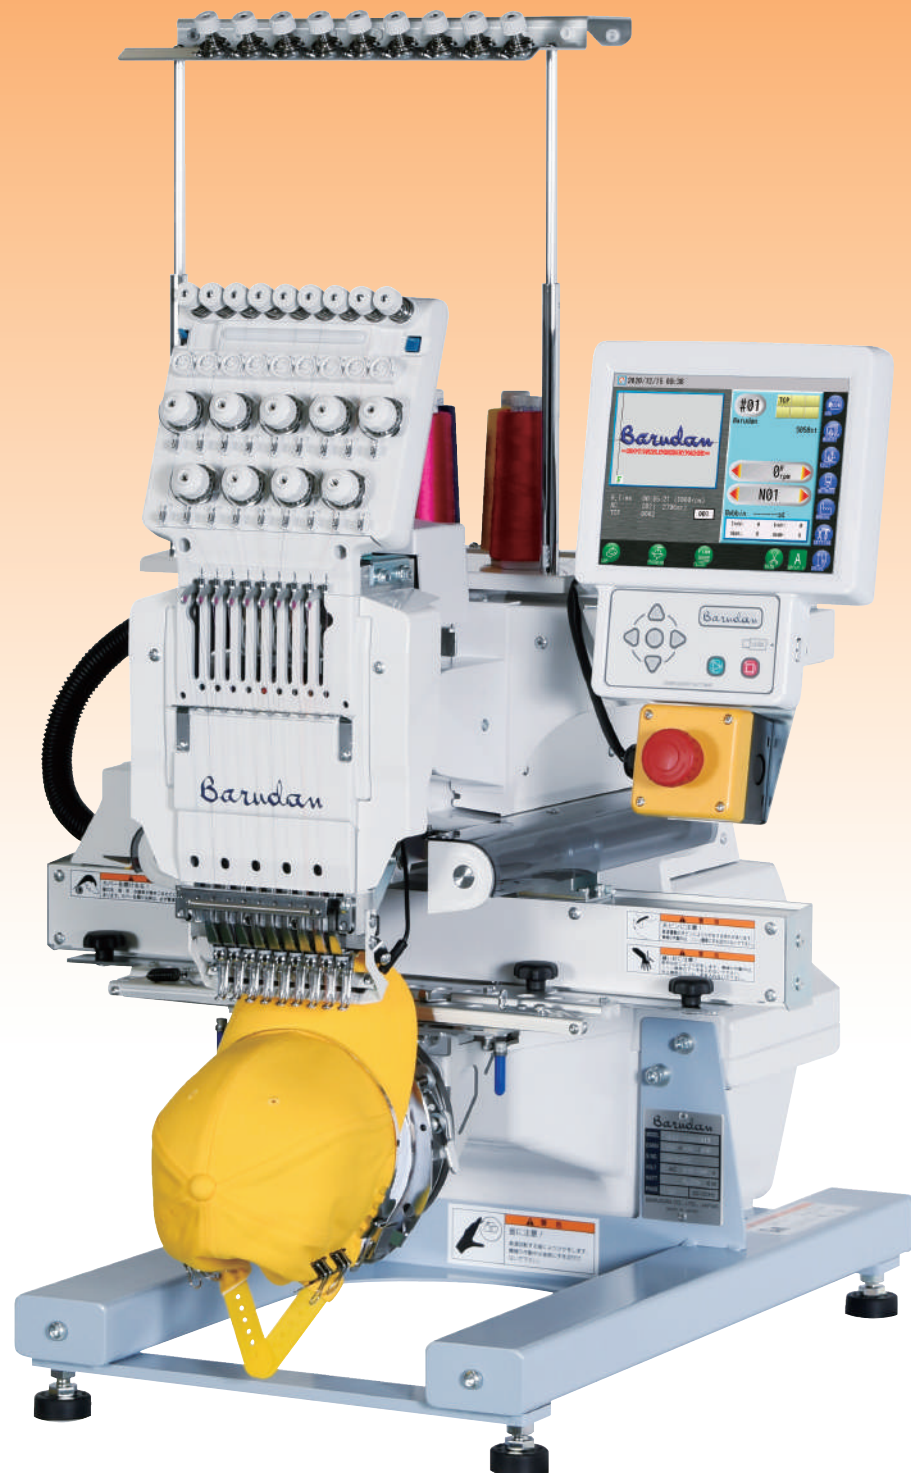


Barudan
THE MOST ADVANCED EMBROIDERY MACHINE SINCE 1959

Accessories

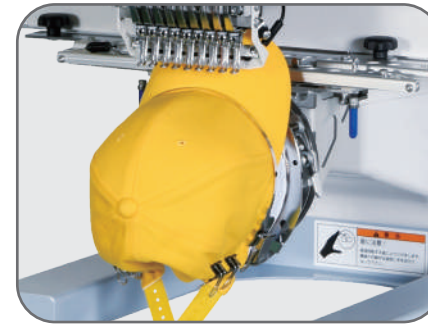

Wide Cap Frame

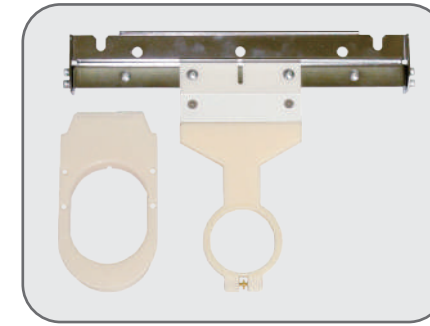

Sock Frames



Frames for Finished Products



Detachable Table



Steel Stand



Bobbin Winder (BN-IV)

B-NET (Option)

Complete Production Management Software

B-NET is an embroidery machine networking system for seamless transfer of designs and offers the following.



Design File Server
Design transfer via LAN connection

Receive Transfer

Sewing Machine Manager
Machine status on floorplan

Thread Break Running

Design File Explorer
Design file viewing and managing

Design File Function Editor
Design editing and function changes

C01 → C02
C03 → C05
C06 → C15

B-NET - Reporting
Productivity & status reporting

B-NET WEB
Machine status, history, and maintenance activities on browser (tablet compatible)

B-NET WEB API ※Optional
Web API lets B-NET integrate with the user's current order entry software

B-NET WEB API × Customer system

BARUDAN CO., LTD.

■Sales Headquarter
1-1 Dainichi, Minamiobuchi, Ichinomiya-city, Aichi-pref.,
491-0014 Japan
Phone +81 586-76-1137
Fax +81-586-77-1499
URL <https://www.barudan.co.jp/>
E-mail info@barudan.co.jp

Agent:

BEKT-S901CAII

MODEL
BEKT-S901CAII



- Frame Centering Function
- Frame Limit Function
Able to restrict machine operation when a design does not fit to the frame or when there is a risk of a needle bar hitting the frame.
- Shortcuts
Customize most-used icons to save time.
- LAN Connector Standard, 1 USB port
- Touch screen (8.4 inch, Resolution 800×600)
- 70 million stitch capacity, 100 memory locations

Machine Specifications / Main Dimensions

MODEL	Embroidery Area (mm)	Cap Frame (mm)	Frames for Finished Products Maximum (mm)	Number of Needles	Stitch Length (mm)	Speed (rpm)	Power Supply (v)	Power Consumption (kw)	Dimensions (mm)							Weight (kg)
									L	W	H	A	B	C	E	
BEKT-S901CAII	250×400	72×360	(Usage Frame) 300×430 (Availability Embroidery Area) 250×400	9	0.1~12.7	(Tubular Frame) 200~1200 (Cap Frame) 200~1000	1 φ 100~240	0.225	600	930	965	680	690	765	800	71

- The embroidery area indicated above allows for maximum pantograph movement. The frame used may restrict the actual embroidery field size.
- Machines and Specifications are subject to change at any time without prior notice.

Name Drop

Separates names in a multiple name design for view and sewing purposes.




Name Drop Drive Mode



Name in Name List



Name in Thumbnail List

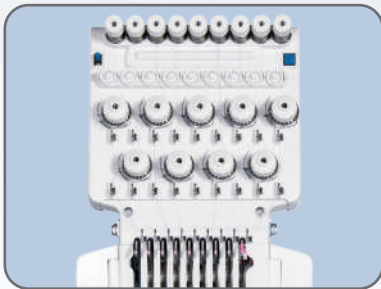


New tensioner system provides better and easier thread tensioning and improved thread break accuracy.

Features



Laser Pointer



LED Light

