


# BEKT-S1501CBIII




**Barudan**  
THE MOST ADVANCED EMBROIDERY MACHINE SINCE 1959


## Accessories

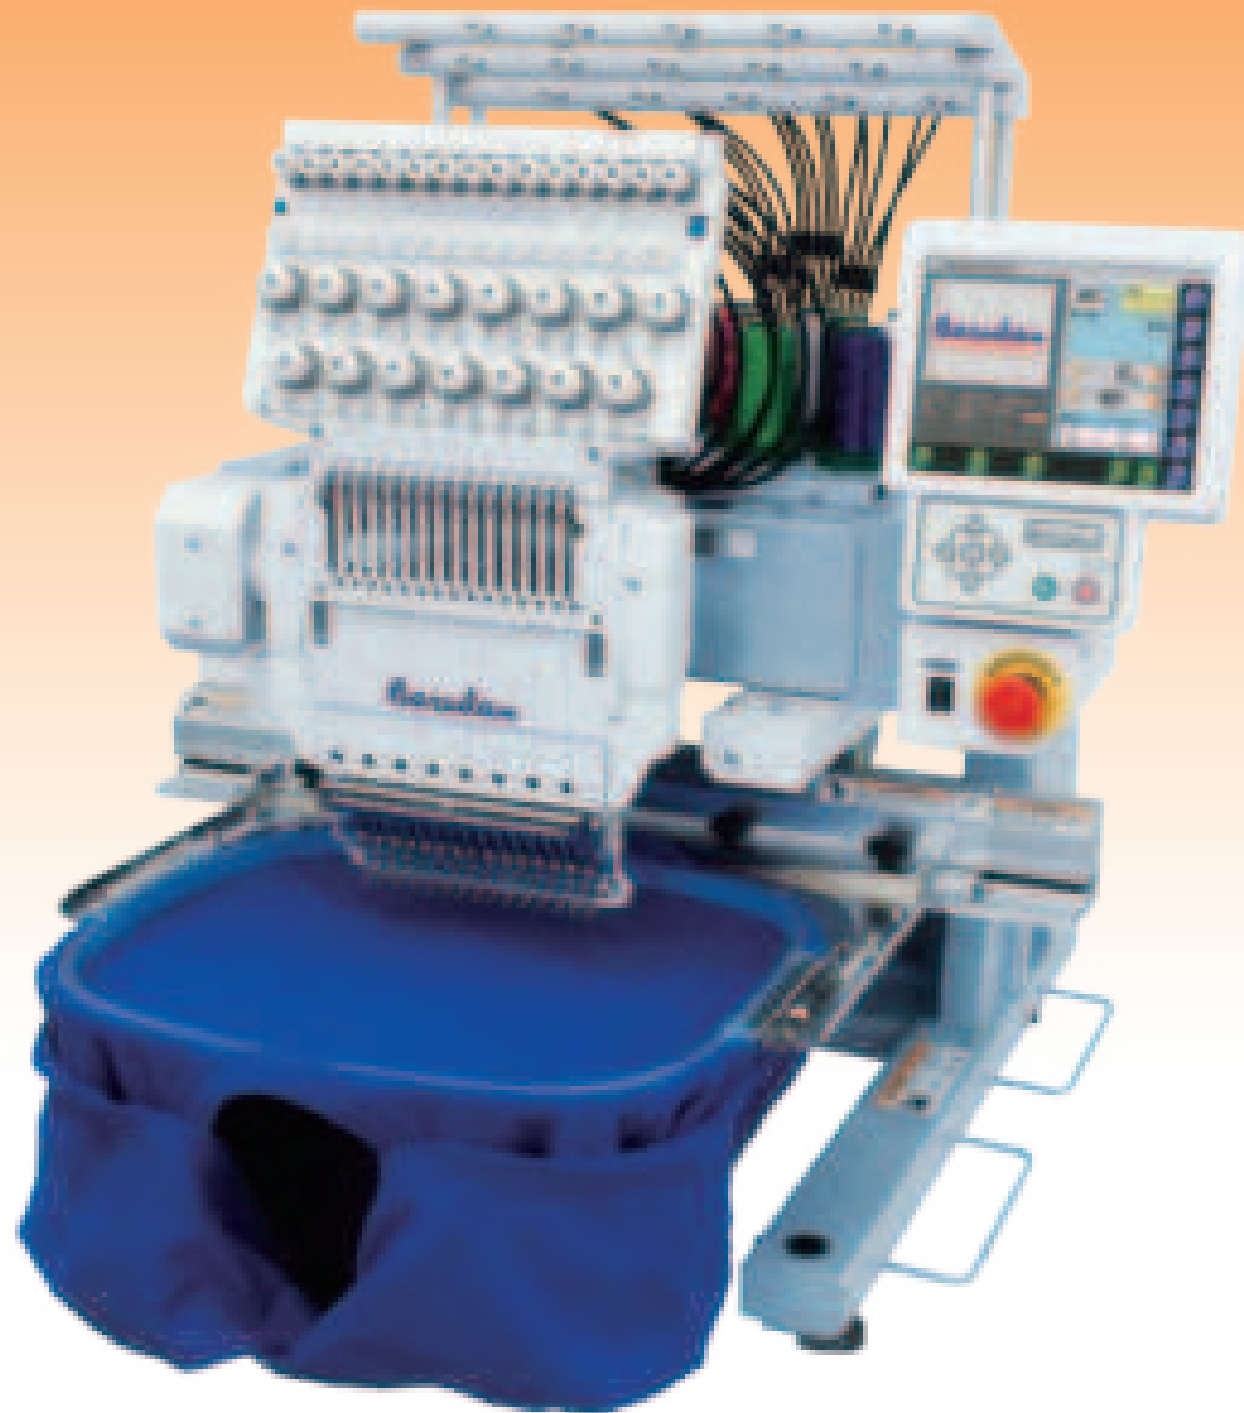


Wide Cap Frame

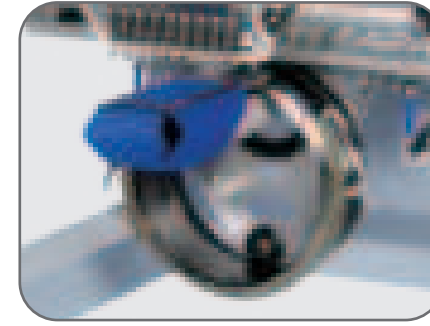


Pocket Frames

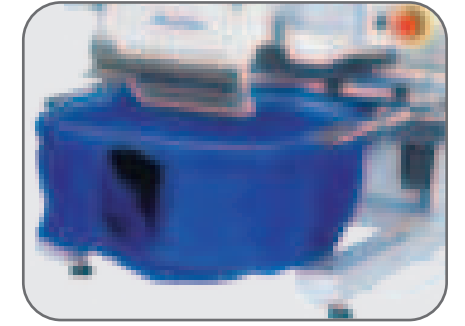

Frames for Finished Products

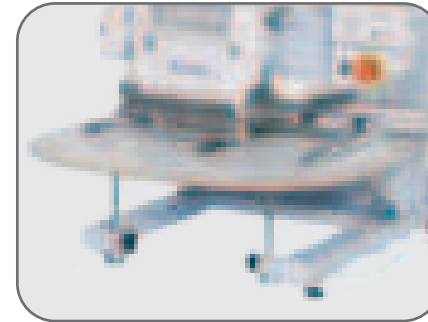

Detachable Table

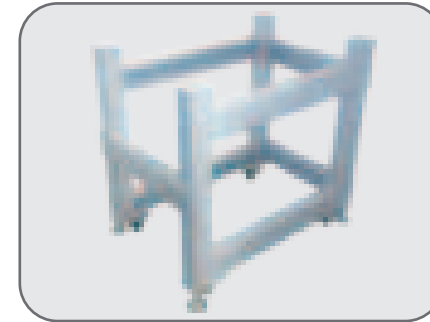

Steel Stand



Bobbin Winder (BN-IV)

## B-net (Option)

### Complete Production Management Software

B-NET is an embroidery machine networking system for seamless transfer of designs and offers the following.



**Design File Server**  
Design transfer via LAN connection

Receive Transfer

**Sewing Machine Manager**  
Machine status on floorplan

Thread Break Running

**Design File Explorer**  
Design file viewing and managing

**Design File Function Editor**  
Design editing and function changes

C01 → C02  
C03 → C05  
C06 → C15

**B-NET - Reporting**  
Productivity & status reporting

**B-NET WEB**  
Machine status, history, and maintenance activities on browser (tablet compatible)

**B-NET WEB API** ※Optional  
Web API lets B-NET integrate with the user's current order entry software

B-NET WEB API × Customer system


## BARUDAN CO., LTD.

■Sales Headquarter  
1-1 Dainichi, Minamiobuchi, Ichinomiya-city, Aichi-pref.,  
491-0014 Japan  
Phone +81 586-76-1137  
Fax +81-586-77-1499  
URL <https://www.barudan.co.jp/>  
E-mail [info@barudan.co.jp](mailto:info@barudan.co.jp)

Agent:

BEKT-S1501CBIII

MODEL  
BEKT-S1501CBIII

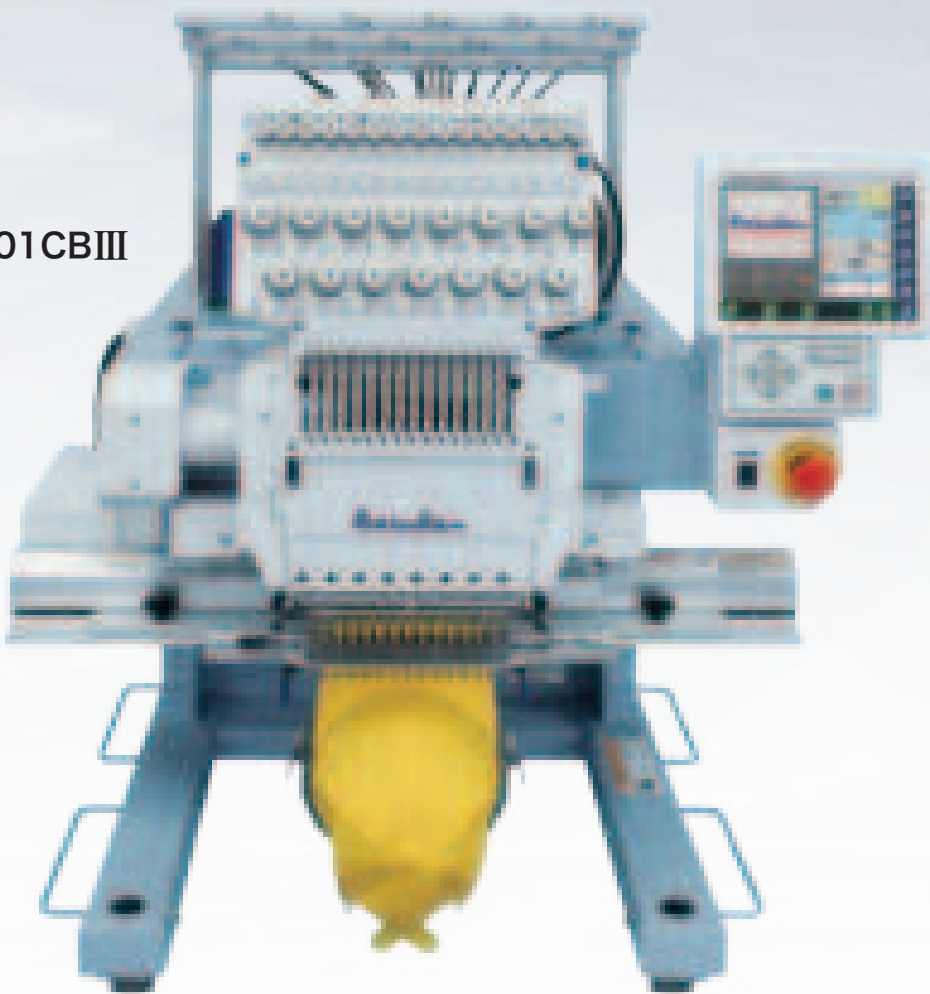

- Frame Centering Function
- Frame Limit Function  
Able to restrict machine operation when a design does not fit to the frame or when there is a risk of a needle bar hitting the frame.
- Shortcuts  
Customize most-used icons to save time.
- LAN Connector Standard, 1 USB port
- Touch screen (8.4 inch, Resolution 800×600)
- 70 million stitch capacity, 100 memory locations

Machine Specifications / Main Dimensions

MODEL	Embroidery Area (mm)	Cap Frame (mm)	Frames for Finished Products Maximum (mm)	Number of Needles	Stitch Length (mm)	Speed (rpm)	Power Supply (v)	Power Consumption (kw)	Dimensions (mm)							Weight (kg)
									L	W	H	A	B	C	E	
BEKT-S1501CBIII	360×500	86×360	380×438	15	0.1~12.7	(Tubular Frame) 200~1300 (Cap Frame) 200~1000	1 φ100~240	0.225	755	995	900	845	795	770	820	96

- The embroidery area indicated above allows for maximum pantograph movement. The frame used may restrict the actual embroidery field size.
- Machines and Specifications are subject to change at any time without prior notice.

Name Drop

Separates names in a multiple name design for view and sewing purposes.




Name Drop Drive Mode



Name in Name List




Name in Thumbnail List



*New thread stand allows easier threading from front of machine.*



*New trimmer system along with smaller diameter cylinder arm allows for sewing deeper into confined areas.*



*New tensioner system provides better and easier thread tensioning and improved thread break accuracy.*

Features



Laser Pointer



LED Back Light

