



RMY SERIES

SAMPLE WASHING MACHINE



STANDART FEATURES

Drum 6mm(rear mirror 5mm)
AISI 316 Stainless Steel Drum
MICRONET Mechanical water counter
Pneumatic water and steam valves
Chemical filling chamber
Gear reducer with transmission system
Frequency inverter
Hydraulic tilting system
Front door pneumatic locking
Front glass door with LED lighting
Pneumatic actuators drainage system
380 Volt -3 Faz-50 Hz Power supply
PLC touch panel control unit

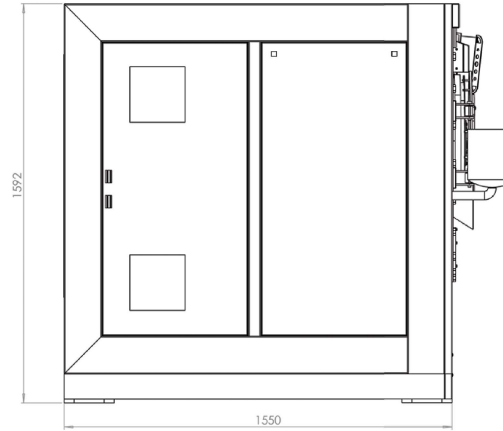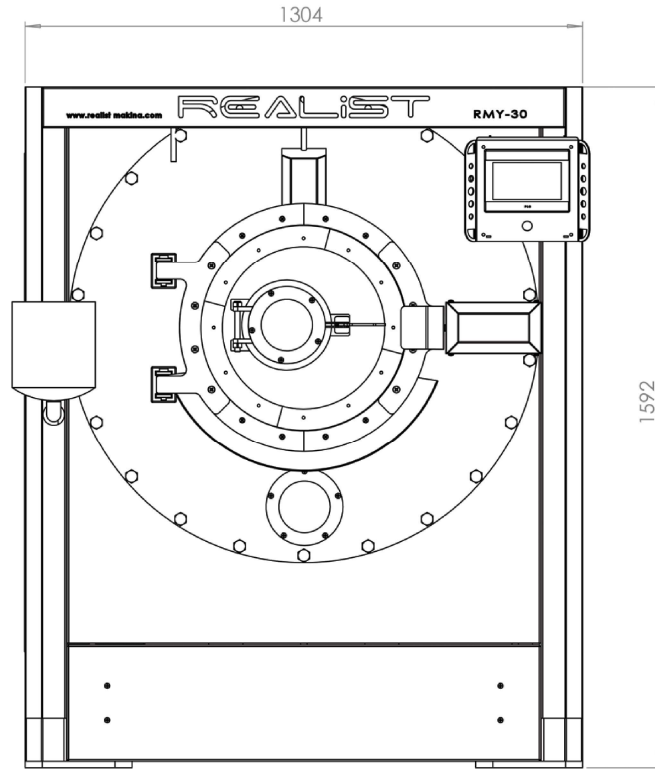

OPTIONAL FEATURES

AISI 304 Stainless steel exterior surface
Water spraysystem on the front door (Vortex)



MODEL CODE	UNIT	RMY 15	RMY 30
Max.Capacity Stone Washing (Dry L.) Maksimum Taşlı Yıkama kapasitesi(Kuru Yükleme)	kg/cycle	7	15
Max.Capacity Enzyme Washing (Dry L.) Maksimum Enzimli Yıkama Kapasitesi	kg/cycle	12	25
Inner Drum Dimensions (Diameter x Length) Volume Tambur Ölçüleri (Çap x Derinlik) Hacim	mm	Ø 800 X 500 (250m³)	Ø 960 X 650 (470m³)
Cylinder (Diameter x Length) kazan Ölçüleri	mm	Ø 870x670	Ø 1030x870
Washing Distributing Speed (Inverter Controlled) Yıkama Hızı (Inverter Kontrollü)	rpm	0-40	0-40
Motor Power (Frequency Converting&Speed Changing) Motor Gücü (Frekans Kontrollü ve Hız Ayarlı)	kw	1,5	2,2
Tilting Angle of Unloading Boşaltma Devrilme Açısı	degree°	-	-
Door Dimension Kapak Ölçüleri	mm	Ø 500	Ø 580
Sample Door Dimension Numune kapak Ölçüleri	mm	Ø 125	Ø 125
Water Consumption Su Harcaması	lt/h	40	90
Steam Consumption Buhar Harcaması	kg/h	25	30
Power Consumption Elektirik Harcaması	kw/h	1,5	2,2
Tap Water Pressure Gelen Su Harcaması	bar	4-6	4-6
Work Pressureof Compressed Air	bar	4-6	4-6
Dimensions (Length x Width x Height) Ölçüler	mm	1230x1100x1375	1550x1305x1590
Weight Ağırlık	kg	1000	1200

RMY 60	RMY 100
30	60
40	80
Ø 1100 X 750 (710m³)	Ø 1300 X 1200 (1590m³)
Ø 1170 X 970	Ø 1370 X 1460
0-40	0-40
2,2	5,5
-	-
Ø 590	Ø 810
Ø 125	Ø 225
120	250
60	100
2,2	5,5
4-6	4-6
4-6	4-6
1625x1470x1765	2200x1800x2015
1400	3000

