



RMY SERIES

WASHING MACHINE



STANDART FEATURES

Drum 6mm(rear mirror 5mm)
AISI 316 Stainless Steel Drum
MICRONET Mechanical water counter
Pneumatic water and steam valves
Chemical filling chamber
Gear reducer with transmission system
Frequency inverter
Hydraulic tilting system
Front door pneumatic locking
Front glass door with LED lighting
Pneumatic actuators drainage system
380 Volt -3 Faz-50 Hz Power supply
PLC touch panel control unit

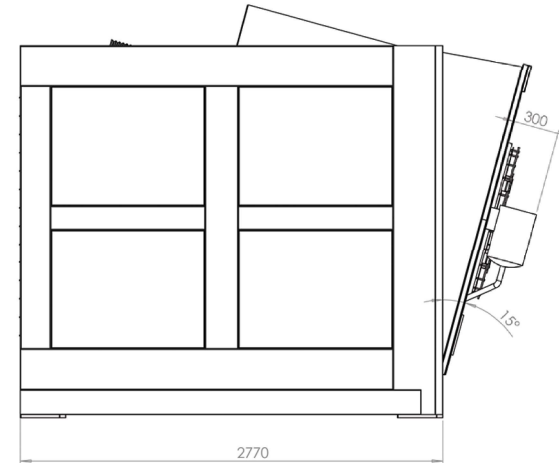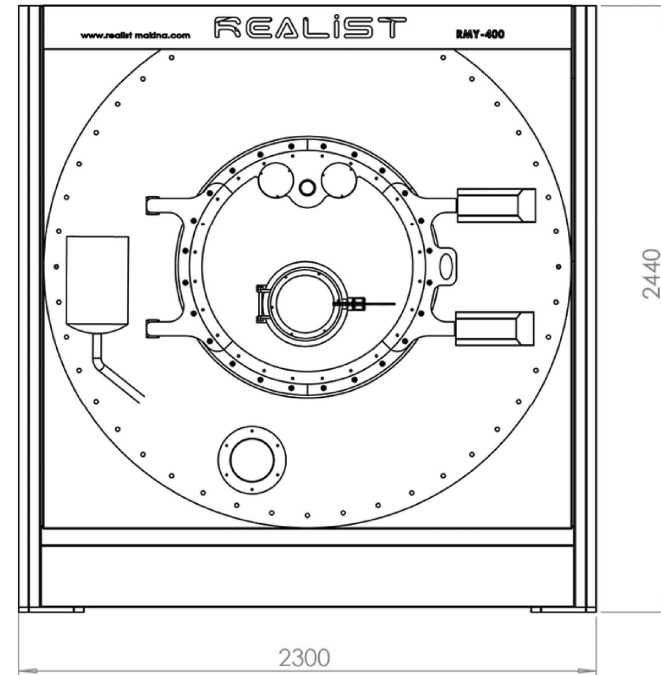

OPTIONAL FEATURES

AISI 304 Stainless steel
exterior surface
Water spraysystem on the
front door (Vortex)



MODEL CODE	UNIT	RMY 200	RMY 300
Max.Capacity Stone Washing (Dry L.) Maksimum Taşlı Yıkama kapasitesi(Kuru Yükleme)	kg/cycle	80	90
Max.Capacity Enzyme Washing (Dry L.) Maksimum Enzimli Yıkama Kapasitesi	kg/cycle	100	120
Inner Drum Dimensions (Diameter x Length) Volume Tambur Ölçüleri (Çap x Derinlik) Hacim	mm	Ø 1500 X 1250 (2200³)	Ø 1700 X 1250 (2840³)
Cylinder (Diameter x Length) kazan Ölçüleri	mm	Ø 1570 X 1600	Ø 1770 X 1600
Washing Distributing Speed (Inverter Controlled) Yıkama Hızı (Inverter Kontrollü)	rpm	0-40	0-40
Motor Power (Frequency Converting&Speed Changing) Motor Gücü (Frekans Kontrollü ve Hız Ayarlı)	kw	7.5	7.5
Tilting Angle of Unloading Boşaltma Devrilme Açısı	degree°	15	15°
Door Dimension Kapak Ölçüleri	mm	Ø 800	Ø 1000
Sample Door Dimension Numune kapak Ölçüleri	mm	Ø 200	Ø 225
Water Consumption Su Harcaması	lt/h	300	600
Steam Consumption Buhar Harcaması	kg/h	150	250
Power Consumption Elektirik Harcaması	kw/h	7,5	11
Tap Water Pressure Gelen Su Harcaması	bar	4-6	4-6
Work Pressureof Compressed Air	bar	4-6	4-6
Dimensions (Length x Width x Height) Ölçüler	mm	2550 x 2000 x 2150	2550X 2100X 2300
Weight Ağırlık	kg	3700	4300

RMY 400	RMY 500
120	150
180	230
Ø1800 x 1500 (3815) m³	Ø 1850 X 1850 (4972m³)
Ø1870 x 1850	Ø 1920 X 2208
0-40	0-40
11	18
15°	15°
Ø 590	Ø 590
Ø 125	Ø 125
120	120
60	60
2,2	2,2
4-6	4-6
4-6	4-6
1625x1470x1765	1625x1470x1765
1400	1400

